
PRODUCT GUIDE

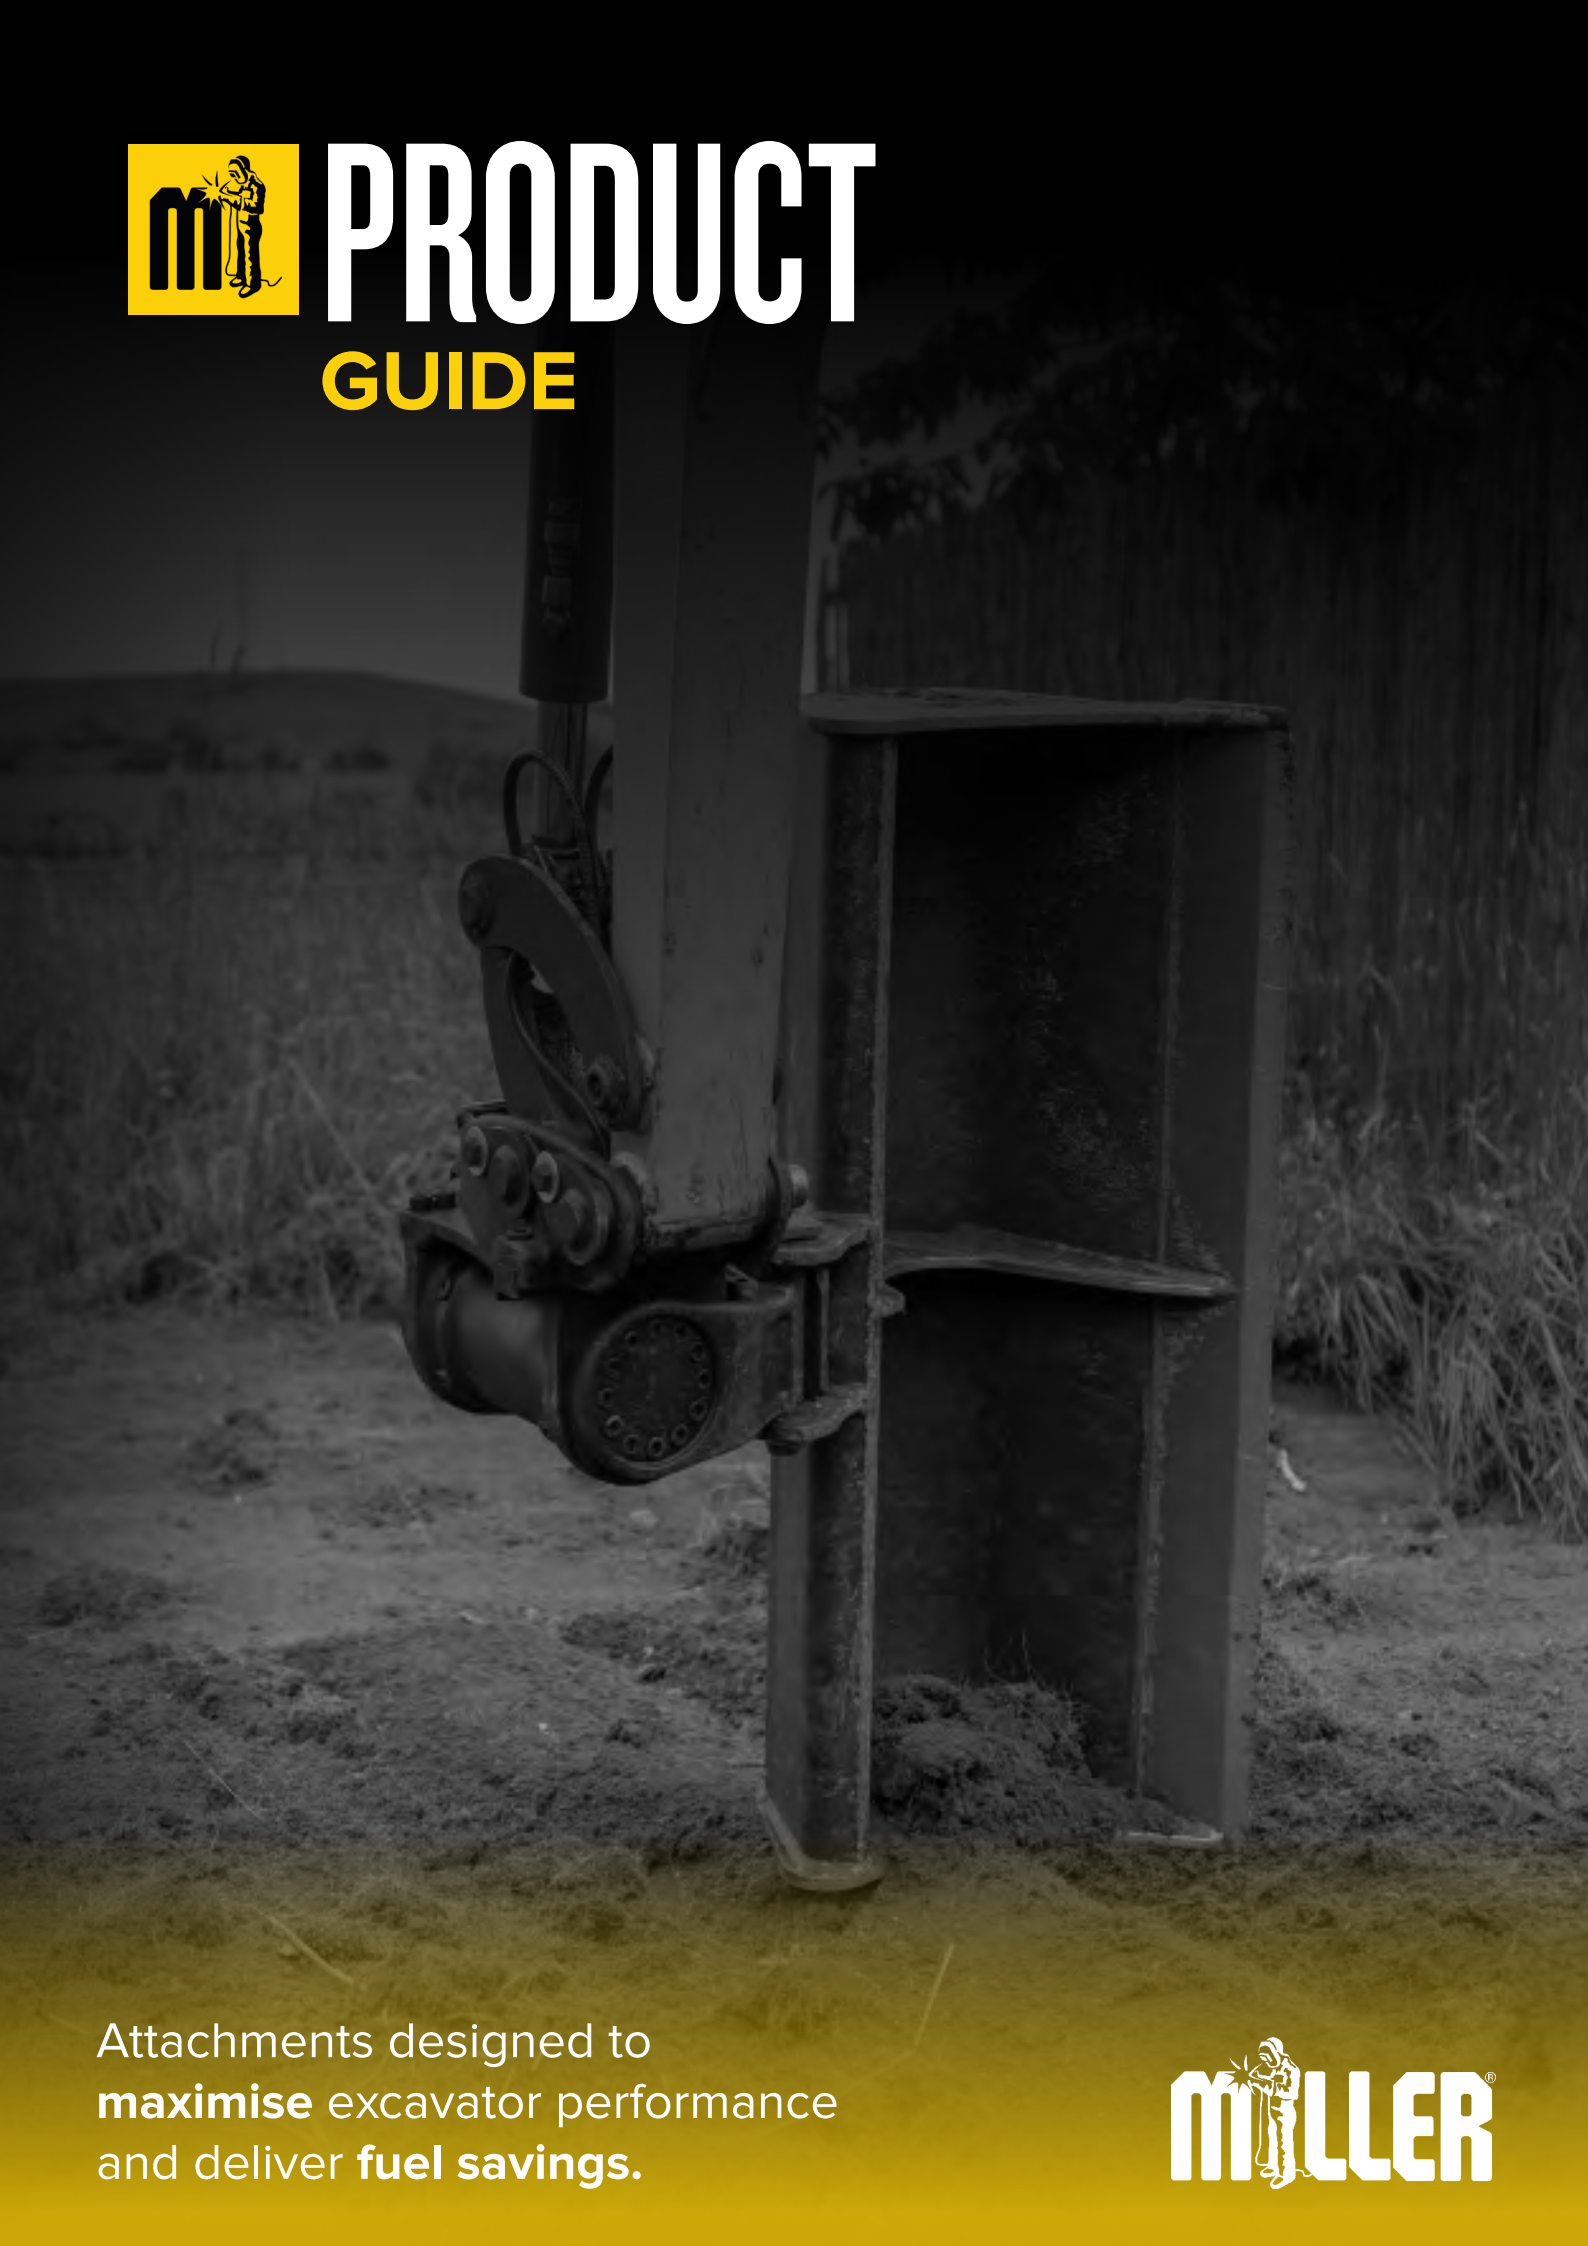

Attachments designed to **maximise** excavator performance and deliver **fuel savings.**

MILLER®

YOUR WORLD CLASS MACHINES

DEMAND THE VERY BEST ATTACHMENTS

As one of the globe's largest earthmoving attachment providers, Miller designs and manufactures an extensive range of hitches and buckets built to bolster the performance and increase the reliability of your machines.

CONTENTS

Page No.

About Miller 4

Hitch Range 7

Compact Quick Hydraulic Hitches 8
HEX Quick Hydraulic Hitches 10
Compact Quick Tilting Hitches 12
HEX Quick Tilting Hitches 14
Manual Hitches 16

Bucket Range 17

Bucket Specification 19
Bucket Application 21
Compact Buckets 23
Bucket Bundles 25
General Purpose 28
Scoop Buckets 30
Trench Buckets 32
Rake Buckets 34
Mud Buckets 36
Tilt Mud Buckets 38
Flat Bottom Buckets 40
Rock Buckets 42
Extreme Rock Buckets 43
Custom 44

Attachment Range 45

Rippers 46

Customer Support 48

Customer Support 49

ATTACHMENT PARTNER

OF CHOICE

With a rich heritage spanning over 47 years of delivering the most innovative hitches and buckets on the market, Miller delivers a full turnkey offering from design, engineering and manufacturing through to supply and commissioning.

Possessing an in-house team comprising the very best-in-class engineers, highly skilled fabricators and welders, and top-tier support services, this is further complemented by the company's state-of-the-art manufacturing facilities. Heavily investing in R&D and testing, Miller prides itself on being at the very forefront of the industry, constantly pushing technology boundaries in safety and efficiencies.

With hubs in Melbourne and Perth, including dedicated workshop facilities, our team fully understands our customers needs - and the modern Australian landscape and excavation practices - to provide the right attachment solutions for the job at hand.

ABOUT MILLER

- Leading Innovation Since 1978
- 5 Global Manufacturing Facilities
- 50+ Countries Supplied To
- Large Stock Availability
- ISO13031/AS13031 Compliant



CUSTOMER TESTIMONIAL

"

What Miller's tilt hitch allows me to do with all of my buckets is absolutely amazing, I will never own a digger without a tilt hitch again!

I would recommend the GTT to anyone. A tilt hitch allows my digger to achieve so much more. It's so much quicker and my small digger can now do things that I never thought it would be physically capable of doing. It has really highlighted to me the importance in taking the time and consideration to choose the right attachment for your machine, as it really can be a game-changer.

"

Toby Beeby, Owner & Operator, Tight Access Excavation

HITCH RANGE

DESIGNED TO DELIVER:

- Safety
- Quality
- Productivity
- Versatility

Available with:

5 YEAR WARRANTY
MILLER GUARD

Specifications provided for our hitch product range are correct as of 30.04.25. These are subject to change. Current specifications will be provided on enquiry. Images used are for reference purpose only.

COMPACT POWER
MAXIMUM RELIABILITY

- **Twin-lock** Front and Rear
- **Universal OEM** Capabilities
- **ISO13031/AS13031** Compliance
- 5 Year **Extended Warranty** Available

GTS

Suitable for machines from **1-6t**

Wholly cast, Miller's GTS is the lightest - yet strongest and safest - fully hydraulic hitches on the market. Enabling smaller excavators to achieve high speed connections of only 18 seconds in comparison to 20 minutes to directly mounting an attachment, the GTS allows operators to pick up the widest range of OEM attachments very easily.



FEATURES

1. **Lower** Offset Design

A compact, low-profile design enables machines to maintain strong breakout forces and stability, which reduces fuel consumption.

2. **Front** Latch

An independent, bi-directional mechanical locking system keeps the front pin engaged on smaller machines for safe, quick attachment changes.

3. **Lifting** Eye

An OEM-rated lifting eye for secure weight handling on compact excavators, making lifting tasks more convenient.

4. **ISO** Hook

A fully compliant ISO13031/AS13031 hook mechanism that acts as a mechanical fallback on small machines, protecting against any hydraulic failure.

5. **Cast** Frame

A uniquely curved, lightweight cast frame made from heat-treated steel, reducing overall hitch weight for minimal fuel burn and easy manoeuvrability on small excavators.

GT Series

BENEFITS

Increased Safety
Improve job site safety for all workers

Low Maintenance
Designed with fewer parts, there is less to maintain

Easy to Install
Allowing operators to get on with the job at hand

SPECIFICATION

GTS Range	Excavator Mass (t)	Hitch Mass (kg)	Pin Diameter (mm)	Min Pickup Width (mm)	Pin Pickup Range (mm)
Range 0A	1 -1.5	15.7 - 17.5	30	94 / 96	85 - 118
Range 0B	1.5 - 2	17.9 - 21.0	30	103	121 - 161
Range 1A	2	23.2 - 26.9	35	109 / 122	125 - 150
Range 1B02	2 - 3	28.6 - 31.5	35	117	160 - 200
Range 1B01	3 - 3.5	34.4 - 35.7	38/40	117	172 - 215
Range 2A	5	55.6 - 58.1	45	144	220-285

Visit www.millergroundbreaking.com/au/products/hitches/gts-au/ to configure your hitch needs.

Scan Me

LIGHTWEIGHT DESIGN

HEAVY DUTY PERFORMANCE

- **Twin-lock** Front and Rear
- **Universal OEM** Capabilities
- **ISO13031/AS13031** Compliance
- 5 Year **Extended Warranty** Available

GTX

Suitable for machines from **8-50t**

Increase machine productivity with Miller's fully hydraulic quick hitch - the GTX - designed to transform excavators into secure and reliable multitool carriers. Delivering high speed connections, the low-profile design offers a shorter pin to point measurement to drive maximum breakout force for greater productivity and efficiency.



FEATURES

1. **Lower** Offset Design

A heavy-duty, low-profile design that maximises breakout force, boosting overall digging performance without compromising on strength.

2. **Front** Latch

An independent, bi-directional front latch incorporating a robust locking system designed to handle higher loads on large excavators, ensuring safe operation in demanding conditions.

3. **Lifting** Eye

A heavy-duty lifting eye rated for high-capacity loads, giving large excavators the versatility to lift and place materials with ease.

4. **ISO Hydro-pneumatic** Cylinder

A dual-lock cylinder system compliant with global safety standards, delivering extra fail-safe security for heavier digging and demolition attachments.

5. **Cast** Frame

A high-strength, curved cast frame engineered from heat-treated steel to handle substantial forces, offering durability and extended wear life for large excavators.

GT Series

BENEFITS

Extreme Performance
Heavy duty built to perform in harsh environments

Low Maintenance
Designed with fewer parts, there is less to maintain

Easy to Install
Allowing operators to get on with the job at hand

SPECIFICATION

GTX Range	Excavator Mass (t)	Hitch Mass (kg)	Pin Diameter (mm)	Min Pickup Width (mm)	Pin Pickup Range (mm)
Range 3	8-10	88 - 97	50 / 60	164 / 184	50: 273-312 60: 290-315
Range 4	11-14	185 - 193	60 / 65	216	60: 345-415 65: 355-420
Range 5	15-19	264 - 277	70 / 80	272	70 - 370-465 80 - 385-470
Range 6	20-22	330 - 347	80	302	430-520
Range 7	24-30	422 - 479	80 / 90	321	80: 440-510 90: 450-520
Range 8	30-36	585 - 704	90 / 100	340	90: 480-590 100: 495-595
Range 9	36-45	738 - 834	100 / 110	367 / 396	100: 525-625 110: 538-630

Visit www.millergroundbreaking.com/au/products/hitches/gtx-au/ to configure your hitch needs.

Scan Me



TILTING PRECISION
FOR MAXIMUM EFFICIENCY

- **Twin-lock** Front and Rear
- **Universal OEM** Capabilities
- **ISO13031/AS13031** Compliance
- 5 Year **Extended Warranty** Available

GTT
Suitable for machines from **1-6t**

Miller's GTT – quick hydraulic tilt hitch – delivers exceptional versatility while enabling fast and easy attachment changes. Achieving up to 180° of tilt rotation, operators can achieve a wide range of motion, simplifying a complex job, while remaining in just one position. Increasing productivity, our lightweight tilt hitch can often eliminate the need for additional specialised equipment, reducing costs.



GT Series

FEATURES

1. **Lower** Offset Design
A low-profile design that optimises pin-to-point geometry for efficient digging and stability, even when tilting at extreme angles.

2. **Front** Latch
An independent, bi-directional front latch system that remains firmly locked under tilt motions, allowing operators to safely operate and detach attachments at a wide range of angles.

3. **180°** Rotary Actuator
A fully integrated tilt system that provides guaranteed rotation of 180°, delivering precise angle control for grading, sloping, and finish work, without sacrificing power or torque.

4. **Lifting** Eye
A reliable lifting eye, ensuring safe handling of loads even when the attachment is angled.

5. **ISO** Hook
A self-contained ISO-certified safety mechanism that prevents attachment loss when rotating or tilting, even in the event of hydraulic failure.

6. **Cast** Frame
A curved, high strength cast frame that remains lightweight to support tilt functionality while providing durability for challenging tasks.

BENEFITS

Increased Versatility
Access hard to reach areas with ease

Improved Productivity
Increase the yield on jobs, driving profitability

Low Maintenance
Designed with fewer parts, there is less to maintain

SPECIFICATION

GTT Range	Excavator Mass (t)	Hitch Mass (kg)	Pin Diameter (mm)	Rotation (°)	Min Pickup Width (mm)	Pin Pickup Range (mm)
Range 0A	1 -1.5	32.9 - 34.2	30	180	94 / 96	85 - 118
Range 0B	1.5 - 2	34.9 - 35.5	30	180	103	121 - 161
Range 1A	2	87.7 - 89.0	35	180	105	125 - 150
Range 1B02	2 - 3	90.8 - 92.7	35	180	117	160 - 200
Range 1B01	3 - 3.5	94.4 - 95.5	38/40	180	117	172 - 215
Range 2A	5	125.9 - 128.4	45	180	144	220 - 285

Visit www.millergroundbreaking.com/au/products/hitches/ to configure your hitch needs.

Scan Me



VERSATILE TILT

HEAVY DUTY PERFORMANCE

- **Twin-lock** Front and Rear
- **Universal OEM** Capabilities
- **ISO13031/AS13031** Compliance
- 5 Year **Extended Warranty** Available

POWERLATCH TILT

Suitable for machines from **3.5-20t**

Offering up to 180° tilt functionality, Miller's hydraulic Powerlatch Tilt can deliver increased versatility in even the most challenging working environments. Its cast compact design with a reduced height, enables weight savings to be achieved, allowing machines to operate to their maximum performance.



FEATURES

1. **Lower** Offset Design

The streamlined, lightweight low profile design enhances pin-to-point measurements. This improves breakout forces, driving productivity, whilst ensuring machine stability.

2. **Front** Latch

Featuring a mechanical locking system, this ensures the front pin remains fully engaged at all times, only allowing release when in a safe orientation.

3. **180°** Rotary Actuator

A robust tilt actuator engineered for both mini and heavy excavators, offering up to 180° rotation. This system ensures superior productivity and power for grading, shaping, or digging in challenging conditions.

4. **Lifting** Eye

Specifically designed for lifting applications, the lifting eye is rated to meet OEM's safe working load limits, ensuring safe and effective weight handling.

5. **ISO** Blocking Bar

The hydraulic ISO blocking bar mechanism guarantees that attachments stay securely engaged, even in the event of total hydraulic failure, and as such is fully compliant with ISO13031/AS13031 standards.

6. **Cast** Frame

The unique curved, cast frame is made from high tensile strength heat treated steel, providing lightweight durability that reduces fuel consumption and enhances wear resistance.

BENEFITS

- Increased **Versatility** — Access hard to reach areas with ease
- Increased **Safety** — Improve job site safety for all workers
- Easy to **Install** — Allowing operators to get on with the job at hand

SPECIFICATION

Powerlatch Tilt Range	Excavator Mass (t)	Hitch Mass (kg)	Pin Diameter (mm)	Rotation (°)	Min Pickup Width (mm)	Pin Pickup Range (mm)
P-Class	3.5	83	40	180	121	172-200
R-Class	5	142	45	180	144	220-261
Range 3	6-10	247	50 / 60	180	164	50: 280-317 60: 290-320
Range 4	11-14	484	60 / 65	180	216	60: 345-415 65: 355-420
Range 5	15-19	548	70 / 80	140	272	70 - 376-472 80 - 391-477
Range 6	20-22	661	80	140	302	430-520

Visit: www.millergroundbreaking.com/au/products/hitches/powerlatch-tilt-au/ to configure your Hitch needs.

Scan Me

CHOOSING THE RIGHT DIGGING BUCKET

FOR THE JOB

It is imperative to choose the right bucket - and size - for the job at hand to maximise a machines performance, increase efficiencies, whilst also maintaining the longevity of equipment.

Miller's buckets have been designed by our in-house team of world-class design engineers to allow operators to reduce cycle times and increase fill load, ultimately reducing fuel consumption. Designed and built to last, Miller has an extensive range of buckets suitable for all applications, from general groundwork through to extremely aggressive digging environments.

FEATURES

1. **Dual Radius** Shell

The dual radius shell has been designed with maximum resistance in high wear areas with further protection from the side cutters.

2. **Bottom** Side Plate

The bottom side plate - a high wear area - is armored with increased resistance using additional high wear resistant steel.

3. **Side** Cutter

The side cutter has been designed with an arrow-like shape allowing superior cutting through the ground.

4. **External** Wearbars

External wearbars prolong the lifespan of the bucket with additional protection added to high wearing locations of the bucket.

Below is a breakdown of the main features used on the shell of Miller buckets, applied across the different ranges depending on application:



GENERAL PURPOSE





HEAVY DUTY

Example of 14t+ Heavy Duty





ROCK





EXTREME ROCK

5. **Internal** Wearbars

Matching the steel grade of the external wearbars, this internal armor delivers extra protection when working with highly abrasive material, extending the lifespan of the bucket.

6. **Edge** Shrouds

Located in a high wearing area, the reversible edge shrouds section provides further protection when digging in hardened environments.

7. **Heel Shrouds** & Wrapper Plates

Positioned on the corners of Miller's extreme rock bucket, these wear parts protect the corners of the bucket, extending its lifespan. The heel shrouds are cast to maximise the strength the material delivers, which is the same hardness as teeth.

8. **Topside** Cladding

The topside cladding plate provides extra protection on the topside and the back corners of the bucket.

MATCHING A BUCKET

FOR SITE CONDITIONS

As experts in buckets with extensive application experience, Miller has continually evolved designs to ensure all buckets deliver maximum fill capacity, whilst achieving weight savings with reinforced material in the right places.

When choosing a bucket, it is important to match the bucket to the site conditions it will be operating in to ensure maximum efficiency and durability is achieved. Using the table below, identify the material that machines will be handling and consider the type of application required, in order to determine the correct Miller spec bucket that is right for the job at hand.

BUCKET APPLICATION

Miller Spec	Abrasion	Miller Recommended Use	Material
General Purpose Compact	Low	Working in confined spaces, acccessing hard to reach areas	Mud/dirt mixed with light stone
Heavy Duty Digging	Low	Muckshift, overburden removal, land clearance	Mud/dirt mixed with light stone
Heavy Duty Trench	Low	Narrow channelling, cabling, pipeworks	Mud/dirt mixed with light stone
Ditch Cleaning	Low	Cleaning wide trenches, loading materials, grading, dressing slopes	Mud/dirt mixed with light stone
Rock	Medium	Light quarry use, post crusher	Gravel, aggregate
Extreme Rock	High	General quarry use, loading at the face	Gypsum, limestone

Once the type of bucket has been identified, it is essential to match the bucket size to an excavators capacity and the density of the material that is being handled. To check the compatibility of buckets with specific machine models, visit millergroundbreaking.com/products/bucket-au/

To check the compatibility of our buckets against the weight of an excavator, visit millergroundbreaking.com/au/products/bucket-au/

Choosing the right mounting and Ground Engaging Tools (GET) for buckets is an important factor when it comes to maximising the efficiency of projects, whilst also minimising wear to reduce unnecessary maintenance costs.

Different jobs will require different GET. The type of material being handled should be taken into consideration, as well as options that are most compatible with each machine.

MOUNTING OPTIONS

Universal Arms

Designed to suit any hitch, Miller's universal arms are compatible with all brands. This mounting option provides full peace of mind increasing a fleet's versatility.

Direct Mount

With the ability to directly mount the bucket to the boom, this option delivers the shortest tip radius, maximising machine productivity. This is an ideal solution when a machine is dedicated to one application, such as mass excavation.

Scoop

Integrated bucket pins with the innovative scoop mounting option, reduces the pin to point dimension, allowing for more materials to be dug, faster and with improved machine cycles.

GET OPTIONS

Bolt on Edge

Miller manufactures its own bolt on edge systems designed to create a perfect flat finish and avoid contact with pipes and cables whilst digging or profiling.

Weld on Edge

This system offers the best of both worlds with a smooth finish achieved with the blade and added digging capabilities delivered from the teeth.

Bolt on Light Duty Teeth

Standard reinforced teeth, commonly used on compact machines, designed for general digging and loading applications.

Weld on Heavy Duty Teeth

Designed for long wear life and to perform tasks that require high penetration, Miller's buckets can be supplied with either CAT type or OEM teeth.

Weld on Rock Teeth

Made for hard terrains, rock teeth are typically applied to 45t+ buckets and are designed for high performance in aggressive conditions.

COMPACT DESIGN
MAXIMUM EFFICIENCY

Increased Fuel Savings

Enhanced Manoeuvrability

12 Month **Warranty***
*T&C's Apply

GENERAL PURPOSE
COMPACT

Suitable for machines from **1-6t**









MUD:	GENERAL PURPOSE:	TRENCH:	TILT:

RECOMMENDED USE

Low abrasive excavation ●

●○○	●○○	●○○	●○○
Cleaning wide trenches, loading materials, grading, dressing slopes	**Muckshift**, overburden removal and land clearance	**Narrow** channelling, cabling, pipe works	**Hard to reach** angles and tight spaces with the capability to tilt laterally 45°

MOUNTING OPTIONS

Universal Arms (1-6t, as standard)	**Universal** Arms (1-6t, as standard)	**Universal** Arms (1-6t as standard)	**Universal** Arms (1-6t as standard)

GET OPTIONS

Bolt on Edge (1-6t)	**Bolt on Light Duty** Teeth (1-6t)	**Bolt on** Edge (1-6t)	**Bolt on Light Duty** Teeth (1-6t)	**Bolt on** Edge (1-6t)	**Bolt on** Edge (1-6t)

FEATURES

Unique Profile Design
Delivers higher fill factor than conventional designs, allowing for faster digging

Low Resistance
Ability to achieve reduced ground resistance enabling reduced cycle times

Maximum Savings
Save time, waste and money through eliminating the need for expensive backfill materials

SPECIFICATION

Excavator Mass (t)	Bucket Type	Width (mm)	Capacity (m^3)	Weight (kg)
2	Trench	300	0.020	33
	General Purpose	450	0.030	42
		600	0.042	81
	Mud	900	0.071	60
	Tilt	900	0.071	67
3	Trench	300	0.032	50
	General Purpose	450	0.053	65
		600	0.075	66
		750	0.097	83
	Mud	1100	0.132	95
	Tilt	1100	0.132	130
4	Trench	300	0.041	66
	General Purpose	450	0.071	78
		500	0.079	83
		600	0.099	100
		750	0.129	125
		900	0.158	150
	Mud	1000	0.160	133
		1100	0.170	144
		1200	0.174	155
	Tilt	1200	0.174	130
		1400	0.296	210
5	Trench	300	0.062	106
	General Purpose	450	0.110	126
		600	0.158	145
		750	0.208	165
		900	0.258	190
	Mud	1200	0.250	210
		1400	0.296	238

READY TO DIG
BUNDLES

To make it easier for dealers, attachment bundles are a great choice. Easy to store and compactly packaged, these bundles - comprising a quick hydraulic hitch and a set of buckets often used in conjunction by operators - are a more cost-effective package for customers when bought together.

- Convenient
- Cost Saving
- Hassle Free
- Easy to Store

BUNDLES

Suitable for machines from **1-9t**

Each bundle includes:



1 QUICK HITCH (GTS, 1-6t GTX, 8-9t)



1 MUD BUCKET



2 GENERAL PURPOSE BUCKETS



1 RIPPER

MUD:	GENERAL PURPOSE:	RIPPER
RECOMMENDED USE		
● Low abrasive excavation		
●○○ **Cleaning wide** trenches, loading materials, grading, dressing slopes.	●○○ **Muckshift**, overburden removal and land clearance.	●○○ **Ripping through** hard soil, frozen ground, rock and other challenging materials.
MOUNTING OPTIONS		
Universal Arms (1-9t, as standard)	**Universal** Arms (1-9t, as standard)	**Universal** Arms (1-9t as standard)
GET OPTIONS		
Bolt on Edge (1-9t)	**Bolt on Light Duty** Teeth (1-6t, as standard)	**Weld on Heavy Duty** Teeth (8-9t, as standard)
		MTG Ripper Tooth (1-9t, as standard)



READY TO DIG
BUNDLES

STANDARD SPECIFICATION

1-2t (30mm)

Hydraulic Quick Hitch				
1 x GTS (0A/0B)				
Buckets	**Width (mm)**	**Capacity (m3)**	**Weight (kg)**	**GET Type**
1 x General Purpose	300mm	0.020	33	BOE
1 x General Purpose	450mm	0.030	42	Toothed (4)
1 x Mud	900mm	0.071	60	BOE
Ripper				
1 x Ripper (0A/0B)	N/A	N/A	30	Toothed (1)

2-3t (35mm)

Hydraulic Quick Hitch				
1 x GTS (1A/1B02)				
Buckets	**Width (mm)**	**Capacity (m3)**	**Weight (kg)**	**GET Type**
1 x General Purpose	300mm	0.035	50	BOE
1 x General Purpose	450mm	0.053	65	Toothed (4)
1 x Mud	1000mm	0.12	112	BOE
Ripper				
1 x Ripper (1A/1B02)	N/A	N/A	38	Toothed (1)

3-4t (40mm)

Hydraulic Quick Hitch				
1 x GTS (1B01)				
Buckets	**Width (mm)**	**Capacity (m3)**	**Weight (kg)**	**GET Type**
1 x General Purpose	300mm	0.048	62	BOE
1 x General Purpose	450mm	0.071	78	Toothed (4)
1 x Mud	1100mm	0.17	144	BOE
Ripper				
1 x Ripper (1B01)	N/A	N/A	57	Toothed (1)

4-6t (45mm)

Hydraulic Quick Hitch				
1 x GTS (2A)				
Buckets	**Width (mm)**	**Capacity (m3)**	**Weight (kg)**	**GET Type**
1 x General Purpose	300mm	0.06	106	Toothed (3)
1 x General Purpose	450mm	0.11	126	Toothed (3)
1 x Mud	1200mm	0.25	210	BOE
Ripper				
1 x Ripper (2A)	N/A	N/A	76	Toothed (1)

8-9t (50-60mm)

Hydraulic Quick Hitch				
1 x GTX (Range 3)				
Buckets	**Width (mm)**	**Capacity (m3)**	**Weight (kg)**	**GET Type**
1 x General Purpose	450mm	0.16	185	Toothed (3)
1 x General Purpose	600mm	0.25	215	Toothed (3)
1 x Mud	1500mm	0.4	275	BOE
Ripper				
1 x Ripper (Range 3)	N/A	N/A	139	Toothed (1)

Bundle Includes

Includes hitch ready installation kit.
For non-hitch ready machines, full installation kits can be provided.



CUSTOMER TESTIMONIAL

“

Miller’s Ready to Dig bundles take the hassle out of stock management, ensuring we can respond to demand quickly by having the right attachments on hand when customers place an order. The bundles are neatly packed for efficient storage, helping us to maximise shelf space and pick stock easily.

”

Mattie Grimes, Stock Manager, Taylor & Braithwaite

SUPERIOR HEAVY DUTY PERFORMANCE

Maximum Breakout Force

Increased Machine Productivity

12 Month **Warranty***
*T&C's apply

HEAVY DUTY GENERAL PURPOSE

Suitable for machines from **8-95t**

Ideal for handling larger loads, Miller's heavy duty general purpose buckets - optimised in weight and capacity - have been designed to achieve maximum breakout force, withstanding 100% machine force to provide greater machine stability.



Reinforced Design

The unique dual radius design - with large fill capacity capabilities - allows increased fill capacity with zero tail drag, reducing maintenance costs.

Increased **Strength**

Reinforced with optimised thickness and grades of steel in additional high wear areas, increases performance, whilst extending the lifespan of the bucket.

Minimal Resistance

Featuring side cutters, this enhances digging capabilities by minimising resistance when cutting through the ground, increasing an excavator's digging power.

RECOMMENDED USE

● **Low** abrasive excavation

●○○ **Muckshift**, overburden removal and land clearance.

MOUNTING OPTIONS

Direct Mount (8-45t, made to order, 45-95t, as standard)

Universal Arms (8-45t, as standard)

GET OPTIONS

Bolt on Edge (8-25t)

Weld on Edge (8-25t)

Bolt on Light Duty Teeth (8-10t)

Weld on Heavy Duty Teeth (8-95t)

Weld on Rock Teeth (45-95t)

SPECIFICATION*

*Guides below are based on buckets being supplied with **universal arms.**

General Purpose Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
8-10	450	0.16	160
	600	0.23	185
	750	0.3	210
	900	0.4	230
11-14	600	0.31	355
	750	0.42	395
	900	0.52	445
	1100	0.63	515
	1200	0.74	540
15-18	750	0.50	480
	900	0.63	535
	1100	0.76	585
	1200	0.90	635
	1350	1.03	675
19-21	750	0.60	660
	900	0.76	730
	1100	0.92	800
	1200	1.09	865
	1350	1.25	920
	1500	1.42	995
22-27	750	0.67	880
	900	0.85	965
	1100	1.04	1060
	1200	1.23	1120
	1350	1.43	1215
	1500	1.62	1305
	1700	1.82	1400

General Purpose Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
29-30	750	0.71	1080
	900	0.91	1185
	1100	1.16	1295
	1200	1.32	1395
	1350	1.53	1480
	1500	1.74	1565
	1700	2.02	1705
	1750	2.10	1730
30-35	900	1.02	1485
	1100	1.25	1610
	1200	1.48	1725
	1350	1.71	1825
	1500	1.95	1920
	1700	2.19	2075
	1750	2.34	2105
36-45	1100	1.47	2280
	1200	1.75	2420
	1350	2.03	2555
	1500	2.31	2780
	1700	2.60	3015
	1750	2.79	3060
	1900	3.03	3200

Direct mount bucket specifications are available on request to meet the compatibility of machines. Visit www.millergroundbreaking.com/au to make an enquiry.

Scan Me

EFFICIENCY
IN EVERY SCOOP



Integrated Bucket Pins

Achieves Fuel Savings

12 Month **Warranty***
*T&C's apply

SCOOP

Suitable for machines from **8-25t**

The precision-engineered scoop bucket has been designed to cut through the ground with minimal resistance and drag to release the full potential in terms of digging power and bucket capacity. With inset pins, the bucket - when combined with a hitch for increased versatility to change work tools - can uniquely achieve the same results as directly mounting a bucket.



Innovative Scoop Mounting

Integrated bucket pins reduce the pin to point dimension, allowing for more materials to be dug, faster and with improved machine cycles.

Superior **Design**

Ensures 100% bucket fill with a self-fill action achieved. The unique deep profile gives an increased payload.

Fuel Savings

Achieving superior performance, allows operators to reduce fuel usage, while making carbon savings.

RECOMMENDED USE

● **Low** abrasive excavation

●○○ **Muckshift**, overburden removal and land clearance.

MOUNTING OPTIONS

Scoop Mount
(8-25t, as standard)

GET OPTIONS

Bolt on Edge
(8-25t)

Weld on Edge
(8-25t, made to order)

Weld on Heavy Duty Teeth
(8-25t)



SPECIFICATION

Scoop Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
8-10	300	0.09	153
	900	0.4	235
11-14	450	0.21	242
	600	0.31	277
	750	0.42	335
	900	0.52	370
	1200	0.74	442
19-21	450	0.3	483
	600	0.45	518
	900	0.76	672
	1500	1.42	915

ACCURATE TRENCH
DIGGING



Improved Material Flow

Material Savings

12 Month **Warranty***
*T&C's apply

HEAVY DUTY TRENCH

Suitable for machines from **8-45t**

A narrow version of Miller's heavy duty general purpose bucket, the trench bucket is ideal for jobs that require accurate widths while digging, allowing operators to achieve accuracy saving both time and money.



Precision Digging

Accurate trench width can be achieved with ease for consistent work, reducing the need for additional shaping or grading.

Improved Material **Flow**

With a dual radius design enabling large fill capacities, the bucket does not drag, further minimising maintenance requirements.

Material Savings

Significant material reduction – and cost savings – with the elimination of materials required to reinstate surfaces.

RECOMMENDED USE

●	●○○
Low abrasive excavation	**Narrow** channeling, cabling, pipeworks

MOUNTING OPTIONS



Direct Mount
(8-45t, made to order)



Universal Arms
(8-45t, as standard)

GET OPTIONS



Bolt on Edge
(8-25t)



Weld on Edge
(8-25t)



Weld on Heavy Duty Teeth
(8-45t, as standard)

SPECIFICATION*

*Guides below are based on buckets being supplied with **universal arms.**

Trench Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
8-10	300	0.09	132
11-14	450	0.21	330
15-18	600	0.38	445
19-21	600	0.45	605
22-27	600	0.49	810
29-30	600	0.52	995
30-35	750	0.80	1370
36-45	900	1.20	2100

Direct mount bucket specifications are available on request to meet the compatibility of machines. Visit www.millergroundbreaking.com/au to make an enquiry.

Scan Me



EFFECTIVE
MATERIAL SEPARATION



Cost Savings

Increased Productivity

12 Month **Warranty***
*T&C's apply

RAKE
Suitable for machines from **13-36t**

Designed to separate a wide range of materials, Miller's rake buckets are ideal for aerating, de-stoning and removing debris from topsoil. The buckets enable operators to cover a wide area, quickly and at a shallow depth, significantly increasing productivity without the need for manual sorting or the requirement of extra tools.



Efficient Material Separation
Ensure only desired finer material passes through while retaining larger debris.

Increased **Versatility**
Designed to handle a wide range of materials, the rake bucket can be used across multiple applications.

Reduced Wear on Machines
Through separation of materials, rake buckets prevent wear and damage to other processing equipment.

RECOMMENDED USE

●	●○○
Low abrasive excavation	**Material separation,** dredging, finishing and surface preparation

MOUNTING OPTIONS

Universal Arms
(13-36t, as standard)

GET OPTIONS

Weld on Heavy Duty
Teeth
(13-36t)



SPECIFICATION

Rake Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
13-15	1500	0.48	609
	1500	0.48	642.2
	1500	0.48	611
	1500	0.48	649.5
	1500	0.48	644.5
	1500	0.48	678.5
20	1800	0.82	1248
36	2000	0.92	1.35

ENHANCED PERFORMANCE
WITH PRECISION POWER

Breakout **Force** Optimisation

Achieves **Fuel Savings**

12 Month **Warranty***
*T&C's apply

MUD
Suitable for machines from **8-45t**

Purposely designed for general clean-up operations, Miller's mud bucket is a wider bucket with a shorter tip radius designed to increase productivity, enabling the excavator to reach its maximum distance.



Enhanced Bucket Shape
The single radius design coupled with a flat floor base and straight sides allow operators to very easily create a flat surface.

Strengthened Build
Engineered using the highest grades of steel, gives the bucket added strength and rigidity.

High Performance
With the ability to cut through material quicker, the bucket delivers increased productivity delivering fuel savings.

RECOMMENDED USE

●	●○○
Low abrasive excavation	**Cleaning** wide trenches, loading materials, grading, dressing slopes

MOUNTING OPTIONS

Direct Mount (8-45t, made to order)	**Universal** Arms (8-45t, as standard)

GET OPTIONS

Bolt on Edge (8-45t)	Available **without GET**, if required



SPECIFICATION*

*Guides below are based on buckets being supplied with **universal arms.**

Mud Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
8-10	1524	0.38	253
10-14	1829	0.61	530
15-21	1829	0.91	690
	2134	1.07	750
21-35	2438	1.81	1420
36-45	2734	2.96	2285

Direct mount bucket specifications are available on request to meet the compatibility of machines. Visit www.millergroundbreaking.com/au to make an enquiry.

Scan Me

IMPROVED
VERSATILITY


Robust Hydraulic Tilting

Enhanced Bucket Shape

12 Month **Warranty***
*T&C's apply

TILT MUD
Suitable for machines from **11-40t**

A flexible and versatile bucket designed to tilt laterally up to 45° in both directions, powered by its robust hydraulic tilting mechanism. Providing greater versatility than a standard mud bucket, the tilt functionality enables operators to save time backfilling, clearing and ditching, which ultimately reduces fuel usage of a machine.

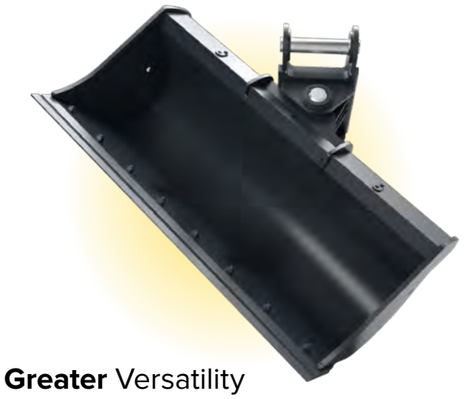

Greater Versatility
The robust hydraulic tilting mechanism enables a swing angle of up to 45° to be achieved either side allowing easier access to hard to reach/restricted areas, increasing productivity and

Increased **Strength**
The bucket has been designed with increased protection for added endurance in the field.

High Performance
With the ability to cut through material quicker, the bucket delivers increased productivity delivering fuel savings.

RECOMMENDED USE

●
Low abrasive excavation

●○○
Cleaning wide trenches, loading materials, grading, dressing slopes

MOUNTING OPTIONS

Direct Mount (8-45t, made to order)

Universal Arms (8-45t, as standard)

GET OPTIONS

Bolt on Edge (8-45t)

Available **without GET**, if required

SPECIFICATION*

*Guides below are based on buckets being supplied with **universal arms.**

Tilt Ditch Cleaning Bucket Range (t)	Width (mm)	Capacity (m^3)	Rotation (°)
11-14	1829	0.61	45 each way, 90 total
15-19	1829	0.91	
20-22	2134	1.07	
24-29	2438	1.81	
30-38	2438	1.81	
39-40	2743	2.96	

Specifications subject to change. Contact Miller for more information.

Direct mount bucket specifications are available on request to meet the compatibility of machines. Visit www.millergroundbreaking.com/au to make an enquiry.

Scan Me



INCREASED STABILITY
FOR MAXIMUM POWER

Increased Versatility

— **Enhanced** Machine Stability

12 Month **Warranty***
*T&C's apply

FLAT BOTTOM
Suitable for machines from **13-35t**

Designed with a flat base, Miller's flat bottom buckets are ideal for cleaning up sites and back-filling holes. Without a rounded or tapered bottom, the design of these buckets allows for greater machine stability – with maximum breakout force achieved – while benefiting from easier handling when placed on flat surfaces.



Easy to Use
Easier to fill and unload, due to its ability to stand upright without support.

Easily **Stored**
With the flat bottom design, the buckets can be easily stacked and stored.

Increased Durability
Built with robust materials, they are designed for heavy use applications in harsh conditions.

RECOMMENDED USE

●

Low abrasive excavation

●○○

Loading material, back-filling, cleaning ditches and sloping.

MOUNTING OPTIONS

Universal Arms
(13-35t, as standard)

GET OPTIONS

Bolt on Edge
(13-35t)



SPECIFICATION

Flat Bottom Bucket Range (t)	Width (mm)	Capacity (m^3)	Weight (kg)
13-15	1800	0.52	706
20	2200	0.92	1156
35	2400	1.31	2115



ENGINEERED FOR
TOUGH TERRAINS

Built to Perfom and Last

Robust, Wear Resistant Build

12 Month **Warranty***
*T&C's apply

ROCK
Suitable for machines from **14-95t**

With optimised wear protection, Miller's rock buckets have been designed to perform, and built to last, in a more aggressive environment. As an all-round tougher bucket with reinforced armor, the rock buckets deliver maximum digging efficiency.



Reinforced Design
The unique dual radius design - with large fill capacity capabilities - allows increased fill capacity with zero tail drag.

Increased **Strength**
Reinforced with optimised thickness and grades of steel in additional high wear areas, increases performance, whilst extending the lifespan of the bucket.

Optimal Performance
With minimal resistance when cutting through the ground – and maximum breakout force achieved – this delivers optimal digging power.

RECOMMENDED USE

●●○ **Medium** abrasive excavation

●●○○ **Light** quarry use, post crusher

MOUNTING OPTIONS

Direct Mount (14-45t, made to order, 45t+, as standard)

Universal Arms (14-45t, as standard)

GET OPTIONS

Weld on Heavy Duty Teeth (14-45t, as standard)

Weld on Rock Teeth (45-95t, as standard)

Scan Me

For technical specifications, send an enquiry with your requirements. Visit www.millergroundbreaking.com/au.

EXTREME ROCK
Suitable for machines from **14-95t**

Built to perform in the most aggressive environments, Miller's extreme rock bucket is armored with additional wear parts, designed to protect the integrity of the core of the bucket itself.



Increased Capacity
The dual radius design allows operators to handle larger loads, increasing productivity through reducing the number of required cycles.

Enhanced **Protection**
Robust wear protection - using the highest-grade steel in the right places for optimised weight savings - delivers the highest abrasion resistance possible.

Higher Machine Efficiency
Capability to achieve maximum breakout force and withstand the full force of machines.

RECOMMENDED USE

●●● **High** abrasive excavation

○○●●● **General** quarry use, loading at the face

MOUNTING OPTIONS

Direct Mount (14-45t, made to order, 45-95t, as standard)

Universal Arms (14-45t, as standard)

GET OPTIONS

Weld on Heavy Duty Teeth (14-45t, as standard)

Weld on Rock Teeth (45-95t, as standard)

Scan Me

For technical specifications, send an enquiry with your requirements. Visit www.millergroundbreaking.com/au.



CUSTOM SOLUTIONS

TO SUIT BESPOKE NEEDS

CUSTOM

Suitable for machines from **14-95t**

We have a team of application specialists, dedicated to designing bespoke attachments. We understand, not one size fits all, and our experience, coupled with our technical expertise, positions Miller as the go-to-provider for delivering the most robust solutions – designed to last – in the industry.



Custom Design

Our engineering teams focus on understanding application needs to design solutions that will deliver maximum yield, increased efficiencies and safety. We have extensive feasibility and testing capabilities to ensure our designs are practical and will deliver superior performance in the field.

Custom **Build**

With state-of-the-art manufacturing facilities coupled with highly skilled welders and fabricators, we can execute complex builds to the very highest standards. We are also fully certified on the Hardox® In My Body Scheme, in recognition of our material selection.

For technical specifications, send an enquiry with your requirements.
Visit www.millergroundbreaking.com/au.

Scan Me



ATTACHMENT

RANGE

DESIGNED TO DELIVER:

- Durability
- Performance
- High Impact
- Efficiency

Specifications provided for our attachment product range are correct as of 30.04.25. These are subject to change. Current specifications will be provided on enquiry. Images used are for reference purpose only.

HIGH IMPACT
FOR MAXIMUM PERFORMANCE

Maximum Cutting Power

Increased Machine Productivity

12 Month **Warranty***
*T&C's apply

RIPPERS
Suitable for machines from **1-50t**

Made from high-tensile RQT steel and equipped with the durable and replaceable MTG RipMet tooth and shroud protector system, Miller's high-impact ripper delivers unmatched reliability and performance.



Extreme Performance
Built with heat-treated steel to withstand the highest levels of mechanical stress, allowing operators to cut through the ground with ease.

Maximum **Strength**
Built to withstand the most demanding environments due to the extra thick shank for maximum strength.

Longer Operational Time
The optimal wear material ratio of the replaceable MTG RipMet tooth and shroud protector system prolongs the lifespan, reducing downtime and operational costs.

RECOMMENDED USE

Ripping through hard soil, frozen ground, rock and other challenging materials.


MOUNTING OPTIONS

Direct Mount
(45-50t, as standard)

Universal Arms
(1-45t, as standard)

GET OPTIONS

MTG Ripper Tooth
(1-50t, as standard)

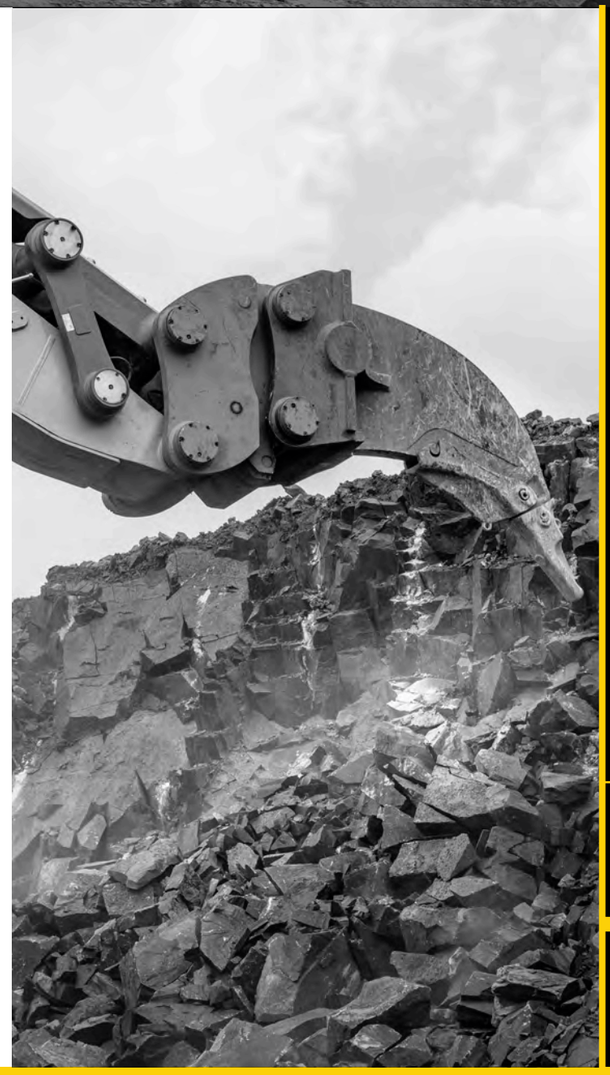

SPECIFICATION

*Guides below are based on buckets being supplied with **universal arms.**

Ripper Range	Excavator Mass (t)	Weight (kg)
0A/0B	1.5	30
1A/1B02	2.5	38
1B01	3.5	57
2A	5	76
R3	8	139
R4	13	312
R6	20	443
R7+	Specifications available upon request	

Direct mount ripper specifications are available on request to meet the compatibility of machines. Visit www.millergroundbreaking.com/au to make an enquiry.

Scan Me



CUSTOMER TESTIMONIAL

“

The bucket fill is really good with very little spill. Because of the geometry, you can fill the bucket to the top without it catching and scratching the bottom of your dipper arm. The buckets have a very good cutting edge on them that make them move through heavy ground with ease, some other OEM’s don’t have this and it makes the machine struggle to dig.

Due to the geometry of each bucket, they operate perfectly on each machine with plenty of curl on them, allowing operators to scoop full loads, whilst having plenty of roll out, emptying with ease whilst also not reaching the RAM stopper.

”

Joe Gilbert, Product Demonstration Manager, SANY

CUSTOMER SUPPORT

DESIGNED TO DELIVER:

- Global Tech Support
- Quick Responses
- Fast Turnaround
- High Safety Standards

PEACE OF MIND
GUARANTEED

Miller prides itself on having dedicated customer service teams to support our customers with every part of the journey of their Miller product's lifecycle. Our sales and customer service team will liaise with you to advise on product selection, ensuring you receive a fast turnaround of your equipment meeting your needs.

5 YEAR WARRANTY
MILLER GUARD

Industry-leading five year extended warranty available on hitches.

OUR SUPPORT SERVICES



Installation & **Commissioning**

Our highly skilled technical field service engineers are fully equipped to attend any sites to install equipment, safely, whilst meeting our high-quality standards. We work around the needs of our customers businesses to ensure we can get new equipment up and running swiftly.



Dedicated Technical Support Teams

Delivering our products to over 50+ countries, we have an international hub of dedicated field response teams. Miller's field service ensures your plant equipment stays operational with nationwide emergency and planned responses available seven days a week. Our skilled technicians provide on-site troubleshooting and permanent solutions.



Technical Product Training

With so many advantages to our hitches, we are passionate to support our customers in being able to communicate these most effectively, ultimately to generate more sales of our customers machines. As such, we can provide technical product training, offering additional support when or if required.



Spares Availability

Across the globe, we have strategically located warehouses housing spare parts, should an issue occur. We understand the importance in minimising downtime and, should a spare part be required, we ensure that we send parts as soon as possible.



SITE SOLUTIONS

We also have a dedicated site solutions team, who are experts in looking after an extensive range of plant equipment, delivering the following services:

Inspection and Monitoring

We provide tailored inspection and monitoring programs based on our customers specific needs to maximise performance and longevity of their plant equipment.

Repairs

Our dedicated repair service team deliver an extensive range of services minimising downtime by working around your business needs.

Refurbishments

We specialise in repurposing, upgrading, and modernising plant equipment across various industries. Refurbishment is a cost-effective approach to extending equipment lifespan, enhancing performance and efficiency.

PRODUCT GUIDE

CONTACT US

MILLER AUSTRALIA
14 Lillee Crescent
Tullamarine,
Victoria, 3043

T: +61 417 537 387
E: info@miller-int.com.au

MILLER UK
Bassington Lane,
Bassington Industrial Estate,
NE23 8AD

T: +44 (0) 1670 707 272
E: info@miller-int.com

MILLER CHINA
Yaojiafang Town,
Economic Development Zone,
Zhangjiakou, Hebei.
PC075312

T: +86 150 3360 6002
E: info@miller-int.com

MILLER AMERICA
Delaware,
Ohio,
USA, 43015

T: +1 309 573 3744
E: info@miller-int.com.au

MILLER INDIA
B-378/1-2,
PID 11-161-B-278/1-2,
Ward No 38, 1st Block,
KIADB Ring Road, Bangalore,
560059

T: +91 988 647 0605
E: india@miller-int.com

Visit Our Website:

MILLER®